



RackGuard Rack Leg Protector Cold Storage

The RackGuard Cold Storage Rack Leg Protector is designed to protect vulnerable rack legs from front, side and scrape impacts by workplace vehicles.

It has been purpose-engineered for applications within sub-zero environments such as cold storage facilities. The RackGuard Cold Storage delivers supreme performance in temperatures as low as -22 °F.

RackGuard Cold Storage protectors absorb and deflect impacts, transferring energy around the rack leg rather than through it, preventing damage to uprights and maintaining the structural integrity of racking systems. Frictional grip points ensure a secure fit to any sized rack leg.



Ultra-low maintenance material is chemical and water-resistant, non-corroding, non-scratch and self-coloured, so no repainting, rusting, flaking or corrosion.

Huge return on investment from incident prevention and downtime avoidance as guardrails, vehicles, floors and equipment do not need replacing or repair.




Rigorously tested to fully comply with EN 15512, EN 15635 and the Australian standard AS 4084



Independently certified by world-leading test experts TÜV Nord



A rubber compression hinge provides added strength under impact, improving performance and longevity.




Molecular reorientation during manufacturing creates a unique built-in memory that enables the RackGuard to fully recover following impacts.



Dual branding option RackGuard can be personalised with your company logo to create a unified branding experience throughout your warehouse facility.




RackGuard works with a specially designed Installation Toolkit (sold separately) to ensure it can be installed and removed easily.



RackGuard has been rigorously tested to fully comply with the highest standards for storage equipment, including EN 15512, EN 15635 and the Australian standard AS 4084. Furthermore, testing has been independently verified by TÜV Nord – one of the world's leading independent test organisations – for total peace of mind.



Standard RackGuards are also available. See separate data sheet for details.



Memaplex™ Sub-Zero has been developed by world-class polymer scientists to deliver maximum performance at sub-zero temperatures. Create from a unique blend of polymers, Memaplex Sub-Zero is designed to withstand impacts without cracking or fragmenting.



Ergonomically designed with a slim profile to limit intrusion into warehouse aisles.




Eco-friendly and 100% recyclable.



RackGuards can also be installed above ground level to protect racks from loading and unloading damage.




Technical Information

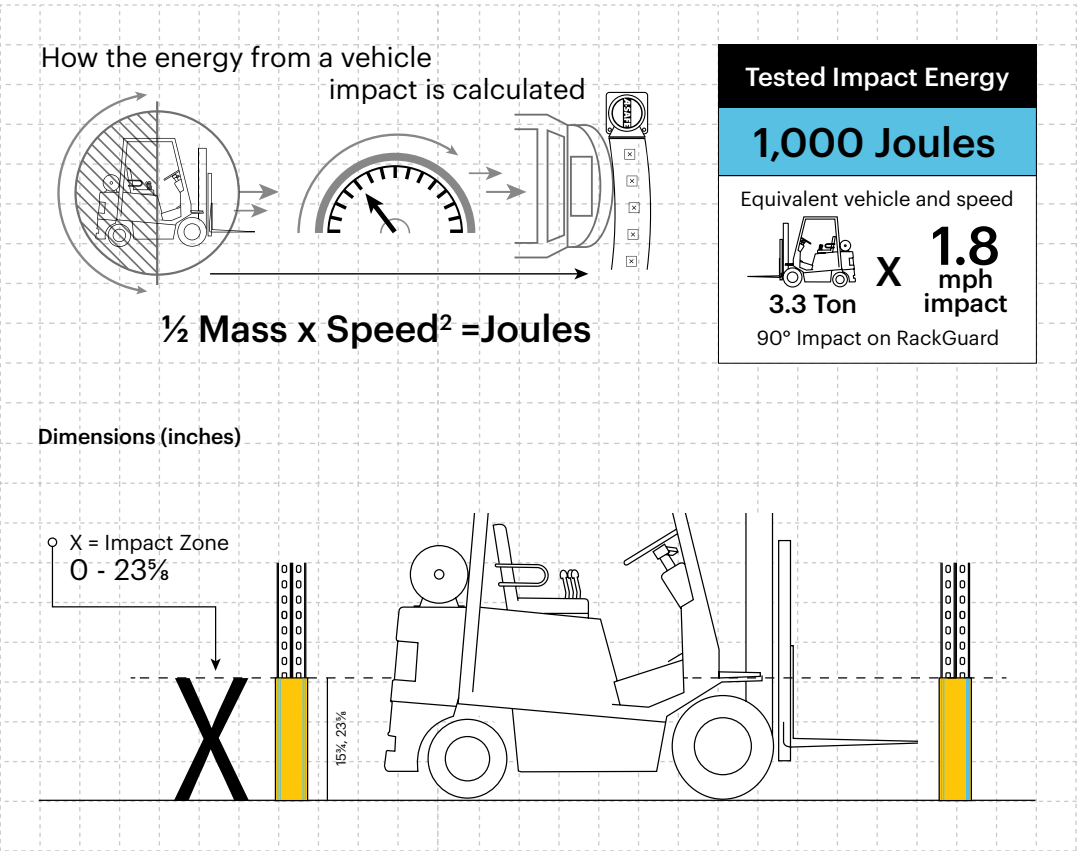

RackGuard Profiles		
RackGuard Sizes		
Description	A-Rack width (max)	B-Rack depth (max)
RackGuard (S) SL	4	1 1/8
RackGuard (S) ML	4	2 1/8
RackGuard (S) LL	4	3 1/8
RackGuard (S) SLR	3 3/8	1 1/8
RackGuard (S) MLR	3 3/8	2 1/8
RackGuard (S) LLR	3 3/8	3 1/8
RackGuard (L) SL	5	3
RackGuard (L) SLR	4 3/8	3

All RackGuards are available in 15% and 23% inch heights.

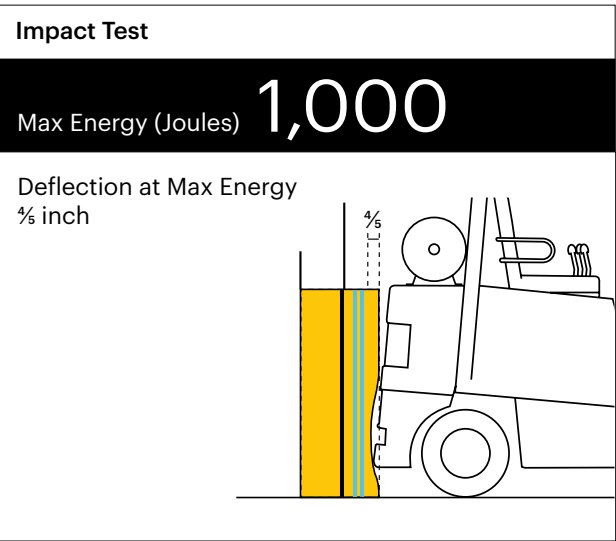

Material Properties	MEMAPLEX™
Temperature Range	-22°F to 32°F
Ignition Temperature	698°F to 734°F
Flash Point	662°F to 698°F
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	10 ¹⁵ - 10 ¹⁶ Ω/sq

Compression hinges have various widths to fit a range of racking profiles.

