



iFlex Bollard

A-SAFE bollards are a multi-functional product used extensively in industrial, commercial and public environments.

Designed to protect structures and equipment from impact damage, and provide a robust physical presence to prevent access or guide vehicles and pedestrians.

Strong, durable and highly visible, A-SAFE bollards permanently reinforce a driver's attention to safe driving and can also act as guidance along traffic routes.






MEMAPLEX™

Ultimate strength polymer
created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Advanced Engineering Molecular
reorientation during manufacturing creates a unique built-in memory that enables the bollard to fully recover following impacts.

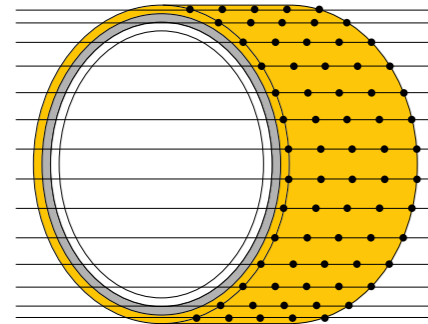

Revolutionary 3-Layered Material

- Inner strengthening core
- Central impact absorption zone
- Outer UV stabilised colour layer



In-line coupling for height flexibility

The iFlex in-line coupling introduces a new level of modularity to the vertical height of a range of A-SAFE products. The coupling enables customers to take the standard 1200mm bollard up to 2000mm.

- **Four pin positioning**
to top and bottom sections gives increased rigidity and stability.
- **Seamless join**
enables easy stacking of top and bottom bollard sections.
- **Moulded pins**
lock securely into the internal layer with a quarter turn.

Suitability


Application




Suitable for pedestrians



Car Park protection



Column protection



Building and equipment protection



Industrial door protection

Vehicle



Heavy Duty Counterbalance FLT



Engine Counterbalance Heavy Duty Forklift Truck



Electric Pedestrian Truck



Horizontal Order Picker



Car

Huge return on investment from incident prevention and downtime avoidance as bollards, vehicles, floors and equipment do not need replacing or repair.

Features and benefits



A versatile product that can be used to protect door frames on vehicle routes where impacts are likely to occur.



Ideal for use on vehicle routes with sharp angle turns such as car parks.




Allow constant access to frequent-use machinery and equipment, whilst protecting from impact with a high strength visual alert.



The rotating wear collar adds an extra layer of protection along the full height of the bollard. The rotating action deflects force from repeat glancing blows. Preventing expensive on-going maintenance costs.



Higher level bollards give a strong visual alert for reversing HGV drivers, preventing costly damage to service yard infrastructure.




Energy absorbent foam creates permanent contact cushion between the internal and external structures.



Technical Information

How the energy from a vehicle impact is calculated

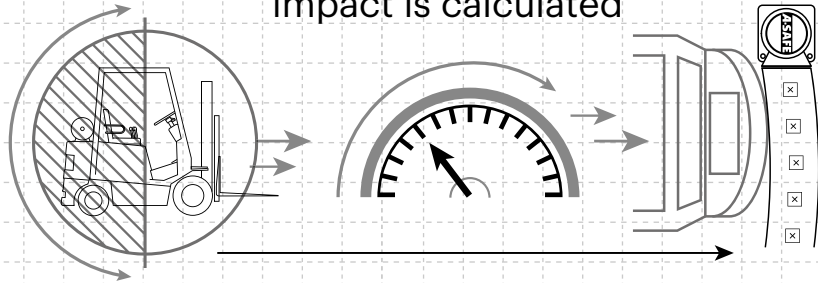


$$\frac{1}{2} \text{ Mass} \times \text{Speed}^2 = \text{Joules}$$



Tested Impact Energy

5,800 Joules

Equivalent vehicle and speed


X **4 mph**
4.7 ton impact
 90° Impact on Bollard

Dimensions (mm)

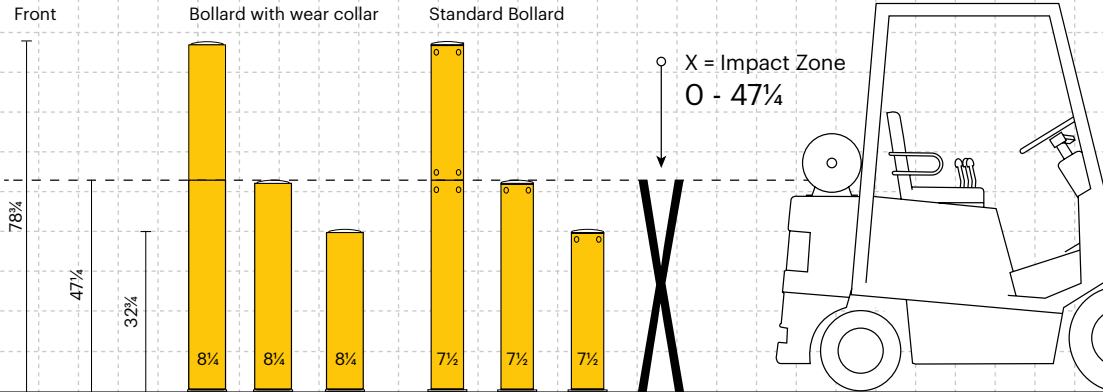

Post Options



Color Combinations


*Please note that the RAL and PANTONE colors listed are the closest match to standard A-SAFE colors, but may not be exact matches of the actual product color and should be used for guidance only.

Impact Test


Max Energy (Joules) at 90°

5,800

Deflection at Max Energy
15° Lean



Force to Bolt
33kN



Material Properties

MEMAPLEX™

Temperature Range	14°F to 122°F
Ignition Temperature	698°F to 734°F
Flash Point	662°F to 698°F
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent

** Light stability scale 1 is very poor and 8 is excellent

A-SAFE Inc

400 North Zarfoss Drive York, PA 17404

Tel: (443) 776 3472 Email: sales@asafe.us www.asafe.com

