

FlexiShield Corner Guard


Specifically designed to protect wall edges and door frames from day-to-day bumps and scrapes from pallet trucks.

Quick and easy to install, the stackable design allows total flexibility in its reach; enabling installation to a height to suit.

The narrow profile keeps intrusion to a minimum whilst protecting infrastructure from scuff damage from hand powered vehicles.




Features and benefits

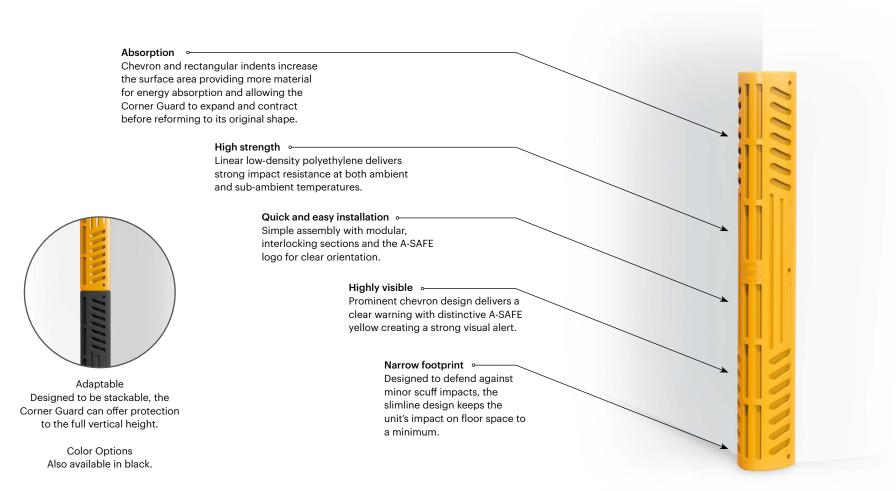



Technical Information

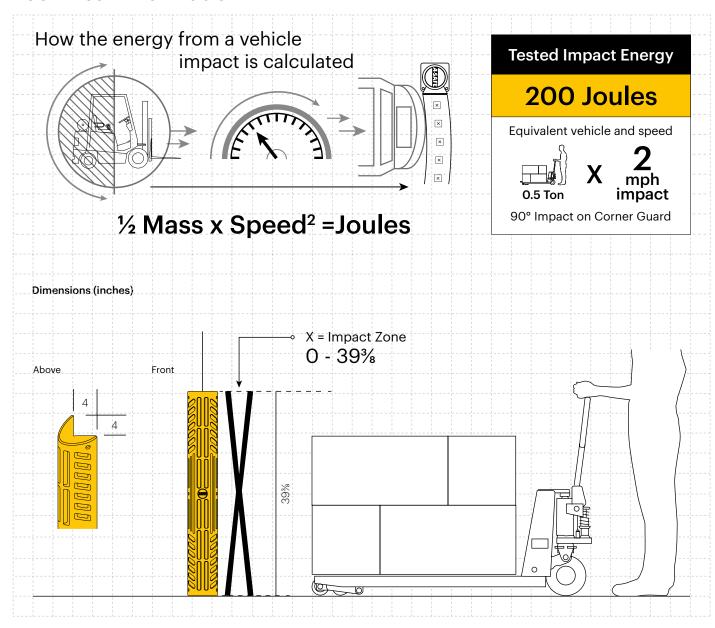

Material Properties	MEMAPLEX"
Temperature Range	-4°F to 122°F
Ignition Temperature	626°F to 770°F
Flash Point	645.8°F
Toxicity	Not Toxic
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	Insulator (1 x 10 ¹¹ Ω/SQ)

^{*} Weathering scale 1 is very poor and 5 is excellent

Colour Options



*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.



^{**} Light stability scale 1 is very poor and 8 is excellent